




ENGLISH

EV25-W EV25-B
EV50-W EV50-B
EV100-W EV100-B
Volume Control

OWNER'S MANUAL
Version 1.2 Winter, 2019

NOX  **AUDIO**®
By syncrotek

INSTALLATION

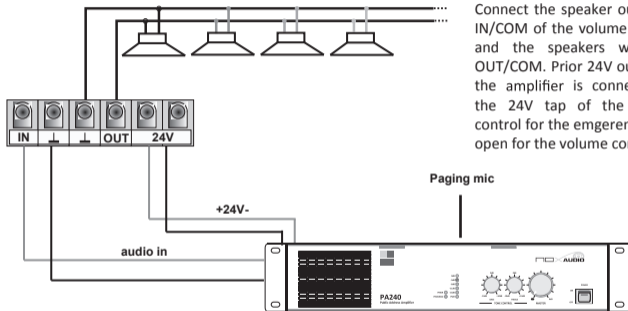

Noxaudio 100 Volt volume control offer the handling power of 25W, 50W and 100W. The chassis is manufactured from high quality molded ABS and the mechanism provide step by step attenuation in 11 steps plus zero position. The volume control is equipped with a 24V priority relay. This way a microphone call will always come through at maximum volume, no matter what position the volume control is in. The chassis that can easily be integrated with Gira, Jung and Euro.

SPECIFICATIONS	EV25-W(B)	EV50-W(B)	EV100-W(B)
Line input:	100V		
Power:	25 Watt	50 Watt	100 Watt
Attenuation per step:	3db		
Total Attenuation:	33db		
Attenuation positions:	10 plus off		
Mounting:	Flush & Surface		
Material:	ABS		
Color:	White (Black)		
Dimensions (H X W X D):	85 X 90 X 95mm		
Weight:	170g	240g	340g

Nox Audio

E sales@noxaudio.com

W www.noxaudio.com

Copyright © Winter, 2019, Nox Audio by Syncrotek Holding. All rights reserved. Due to constant improvement of products, all or some specifications are therefore subject to change without prior notice.



Technical Department
techsupport@noxaudio.com

